



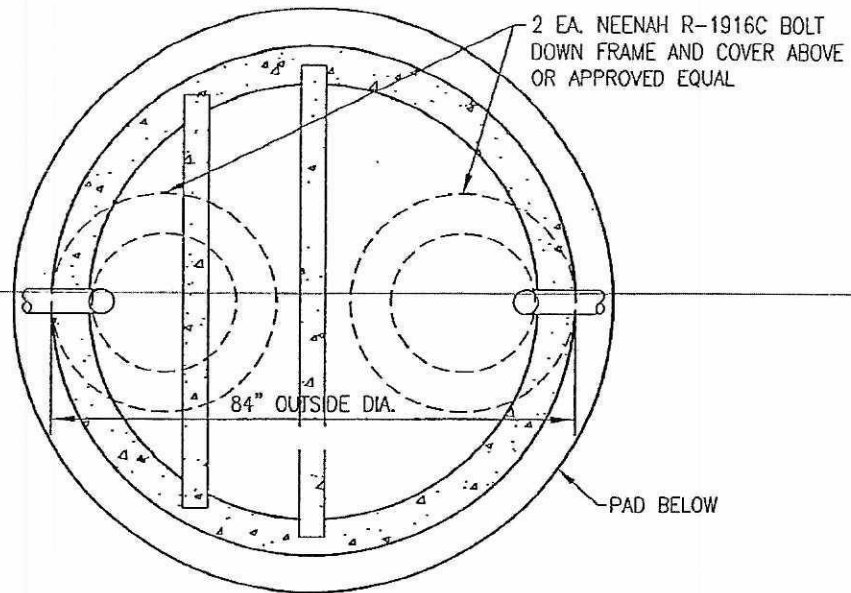

PLAN VIEW

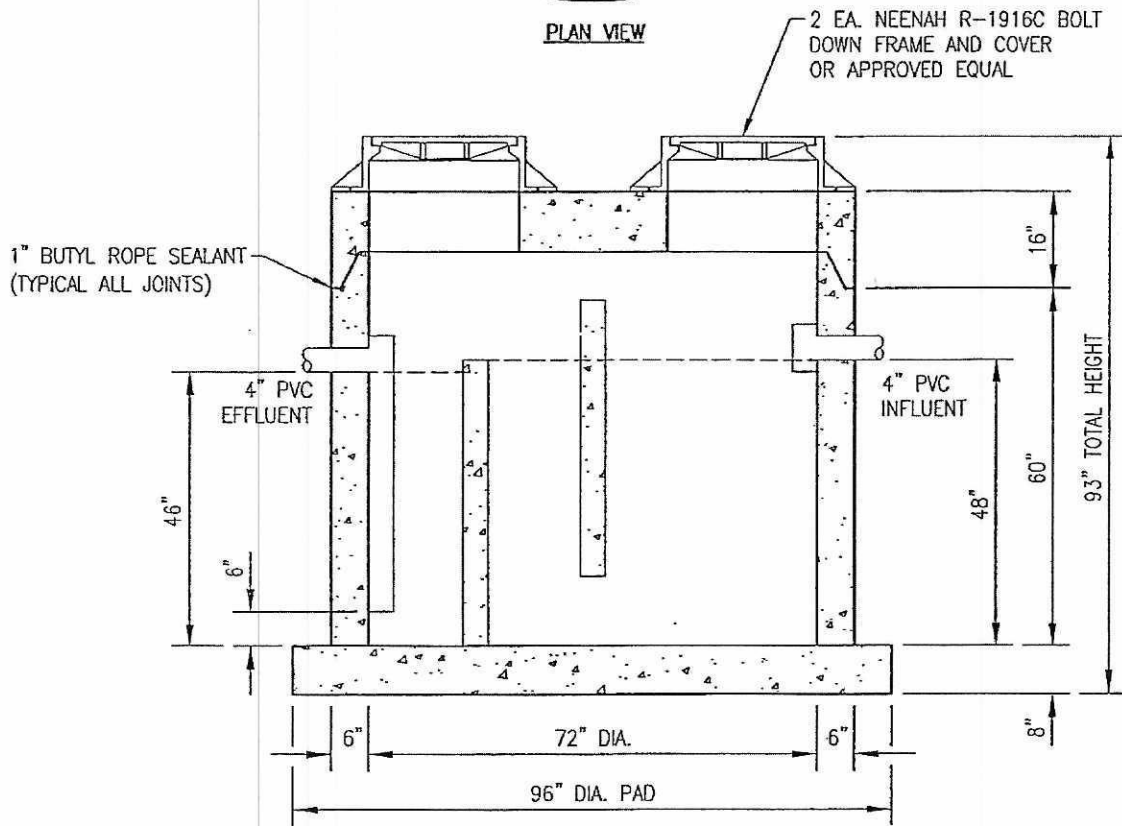

SECTION

GREASETRAP SHALL BE CAPABLE OF WITHSTANDING H-20 LOADING, IF
LOCATED IN A PAVEMENT AREA.

**750 GALLON REINFORCED CONCRETE
GREASE INTERCEPTOR**




DATE: 7/26/06
DRAWN BY: DAB

750 GALLON REINFORCED
CONCRETE GREASE INTERCEPTOR

GREASE TRAP
(750 GALLON)


APPENDIX "E"

ADD RISER SECTIONS TO
GREASE INTERCEPTOR PER
VILLAGE OF SWANSEA SEWER
REQUIREMENTS TO ACHIEVE
FINISH GRADE ELEVATION

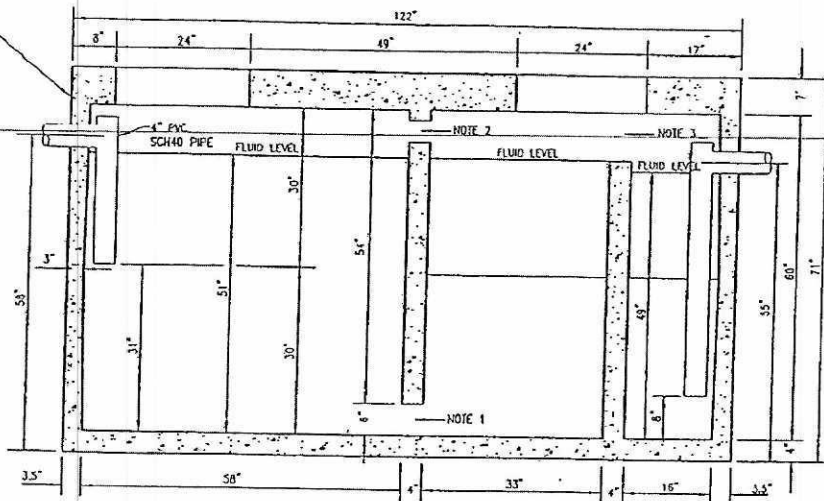

NOTE 1: 6'H x 32"W OPENING AT BOTTOM CENTERED
NOTE 2: 2-4" DIAMETER HOLES - 2" DOWN - 4" OFF CENTER - 8" BETWEEN HOLES
NOTE 3: 9'H x 24"W OPENING AT TOP CENTERED

SIDE SECTION

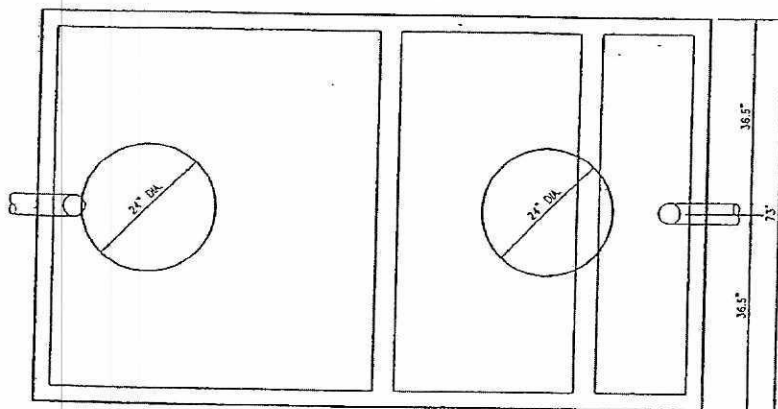

TOP VIEW

WEIGHT: 14,670 LBS

NOTE:

THIS TANK IS NOT DESIGNED FOR VEHICULAR TRAFFIC. IF USED IN TRAFFIC AREAS A REINFORCED CONCRETE SLAB MUST SPAN THE TANK AND OVERDIG TO PROTECT THE TANK.

OPTIONS:
GRADE RISERS (DONUTS)
FRAME & COVERS
LARGER INLET & OUTLET
BIO-CEM ENZYME ADDITIVE
SEALANT

500 GALLON REINFORCED CONCRETE
GREASE INTERCEPTOR

EXCAVATION SIZE: 11'L x 7'W



DATE: 1/21/05
DRAWN BY: DLS

1500 GALLON REINFORCED
CONCRETE GREASE INTERCEPTOR

GREASE TRAP
(1500 GALLON)